

ADVANC3D


Materials

3D-PRINTING MATERIALS FOR ADDITIVE MANUFACTURING

Development, production and distribution
of raw materials for 3D-printers

ADWIRE[®]

FILAMENT FOR FDM APPLICATIONS

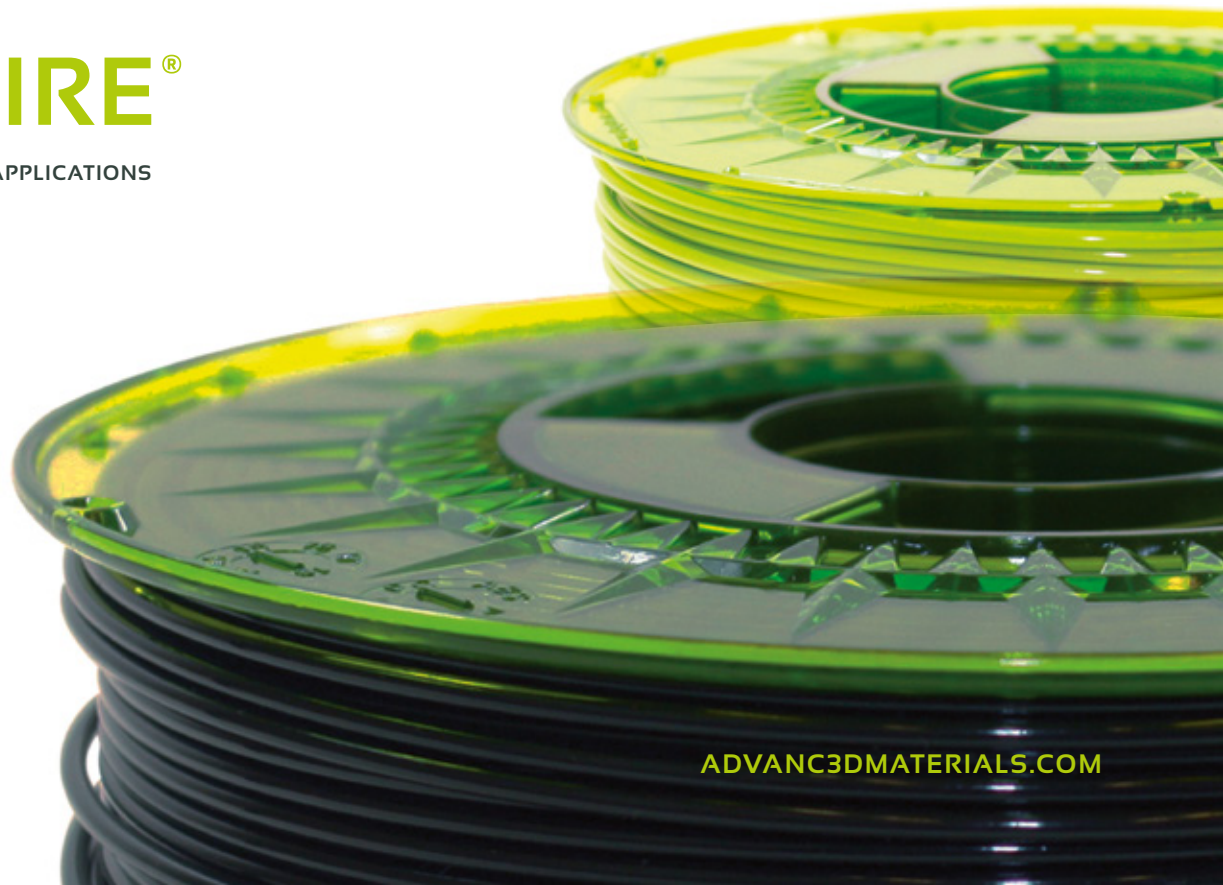

ADVANC3DMATERIALS.COM

All AdWire® products are **RoHS compliant**





Our products are available in
ø 1.75 mm / 3 mm and 1 kg spools*


ADWIRE®





Filament for FDM printers




Available in **PLA (bio material)** 



Deep Black	
Space Grey	
Olive Green	
Rich Green	

Lime Green	
Sky Blue	
Nut Brown	
Burgundy	

Bright Red	
Rose Pink	
Juicy Orange	
Smiley Yellow	

Creative White	
Ice White	
Translucent	

Available in **ABS**



Deep Black	
Sky Blue	
Ice White	

Available in **ABS Recycled** 




Black	
-------	---

Do something good for our planet: use recycled ABS from post consumer leftovers, and give a second life to old fridges and cars!
Our environmentally friendly ABS!

Available in **PETG**

Black		Translucent	
Blue		Ice White	

Available in **ABS Medical**

White	
-------	---

PETG allows firm and much more resistant prints, with higher mechanical properties. All this using your regular printer!
(Recommended printing temperature: 230 – 250°C)

Buy all our AdWire® products in our webshop

a3dm-shop.com

Wood filament for FDM printers

Available in **PLA (bio material)** 

* only available in 0.5 kg spools

Wood



Wood is a PLA that imitates wood looking and feeling into a very realistic level. And as simple to print as PLA!
(Recommended printing temperature: 190 – 220°C)

Available in **PVA**

Coming soon

Translucent



PVA is a perfect filament as support given its solubility in water.
This is a great advantage in dual extruders printers!

Cleaning filament for FDM printers

* only available in 0.1 kg spools

Translucent



Tired of complications when changing between filaments?
Using our cleaning product between different rolls, minimizes clogged nozzles and color variations. *(Recommended printing temperature: 160 – 280°C)*

Available in **COC Medical**

Coming soon

Translucent



ADWIRE[®]

CUSTOM

Tailor-made filaments

We create specific products on demand (different grades of conductivity, solubility, flame retardant, exclusive colors, smell and textures varieties).

Email us your specifications at info@advanc3dmaterials.com

We also can sample a 3D printed prototype of your parts with our materials!



Very low diameter tolerances



100% color uniformity



Tested on most popular desktop and industrial 3D printers



ADVANC3D Materials® GmbH

Brandstwiete 1
20457 Hamburg
Germany

Phone +49 (0)40 303 933 11
Fax +49 (0)40 303 933 13
info@advanc3dmaterials.com

ADVANC3DMATERIALS.COM
A3DM-SHOP.COM